




FOR

PIWOT

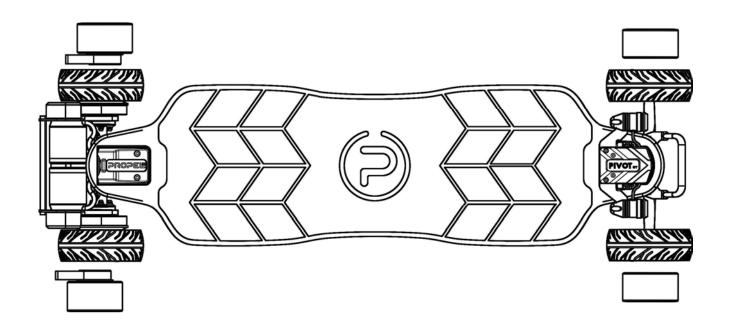

QUICK NAVIGATION


CONTENTS

PIVOT COMPONENTS	1
PRE-RIDE CHECKLIST	2
POWER ON/OFF	3
REMOTE CONTROL	4
CHANGING WHEELS	6



ALL PICTURES ARE FOR ILLUSTRATION AND ILLUSTRATION ONLY. DIFFERENT SERIES OF PIVOT PRODUCTS MAY DIFFER IN APPEARANCE AND MATERIAL. PLEASE REFER TO THE ACTUAL PRODUCT.

PIVOT COMPONENTS

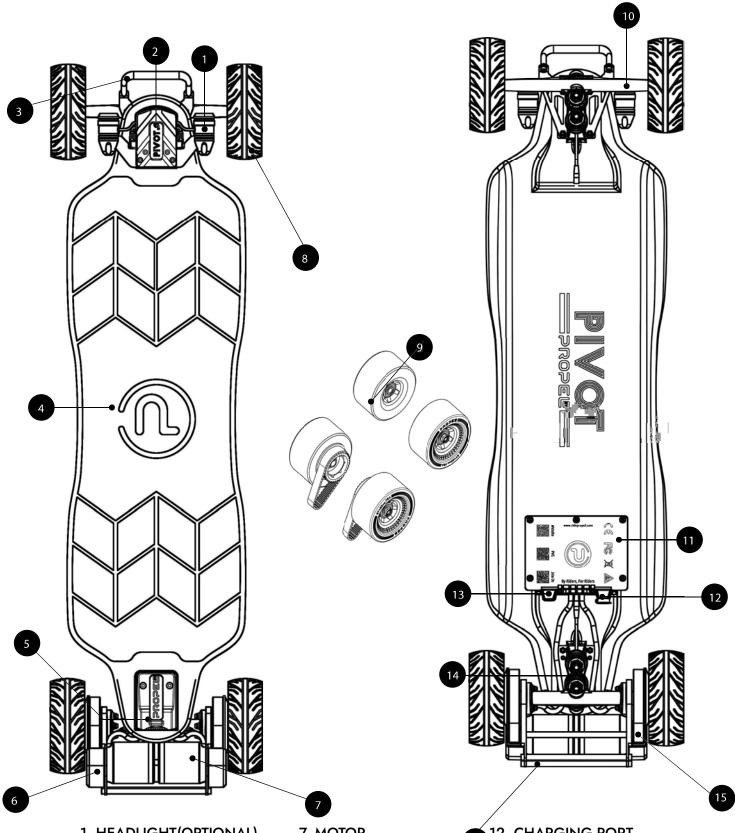

- 1. HEADLIGHT(OPTIONAL)
- 2. FRONT BADGE
- 3. PULL BAR(OPTIONAL)
- 4. DECK
- 5. TAIL LIGHT
- 6. BELT GUARD

- 7. MOTOR
- 8. AT WHEEL
- 9. PU WHEEL
- 10. DKP TRUCK
- 11. INTERNAL ACCESS PANEL/HEAT SINK
- 12. CHARGING PORT
 - 13. POWER BUTTON
 - 14. BUSHING
 - 15. BELT
 - 16. MOTOR PROTECTION BRACKET

PAGE 1

PRE-RIDE CHECKLIST

BEFORE EACH RIDE, INSPECT YOUR BOARD AND REMOTE FOR DAMAGE. DO NOT RIDE IF DAMAGED.

CHECK WHETHER THE PARTS ARE DEFORMED OR WORN.

CHECK WHETHER THE SCREWS ARE LOOSE BEFORE USE AND OFTEN THROUGHOUT OWNERSHIP.

AFTER THE SKATEBOARD IS STARTED, CHECK FOR ABNORMAL SOUNDS. DO NOT USE IT UNTIL THE CAUSE OF THE ABNORMAL SOUND IS FOUND AND RESOLVED.

CHECK BOTH THE FRONT AND REAR TRUCKS AND THAT ALL FOUR WHEELS ARE SECURE.

BE SURE TO MAINTAIN YOUR TIRE PRESSURE.

PROPERLY SECURE YOUR HELMET AND PROTECTIVE PADS.

MAKE SURE YOUR BOARD AND REMOTE BATTERIES ARE FULLY CHARGED.

READ THE SAFETY INSTRUCTIONS IN THE PACKAGE CAREFULLY AND FOLLOW IT.


PUSH THE BOARD TO START A FANTASTIC RIDE

POWER ON/OFF


ROLLING START: This board is equipped with "rolling start" which means you can shove/push the board ahead and once it has reached a speed that is over 5km/h it will turn itself on (You will hear a beep).

POWER ON: The power button is a self-reset switch, which is installed at the bottom of the PIVOT, close to the motor side.

POWER OFF: Press the power button or leave the skateboard stationary for 5 minutes, and the skateboard will automatically turn off.

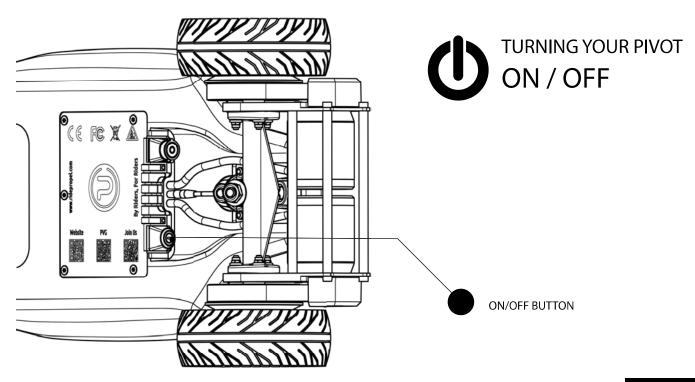

REMOTE CONTROL

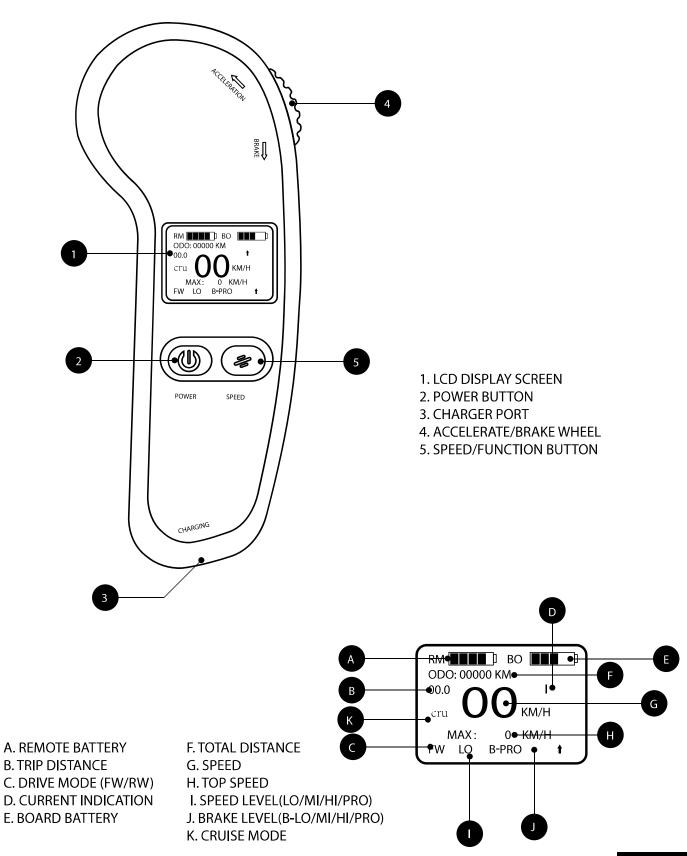

REMOTE PAIRING

- 1. Begin with the board and the remote turned off.
- 2. Turn on the board by depressing the power button, and release. The power button should illuminate.
- 3. Depress power button again and hold for 5-7 seconds utill it begins flashing, depress. The flashing power button means it's ready to pair.
- 4. Turn on remote.
- 5. Press both buttons for 1 second, simultaneously, release. (You'll see the battery meter populate)
- 6. Board is now paired.

REMOTE FUNCTIONS

(1) Scroll wheel

Push the wheel forward to accelerate, and push the wheel backward to slow down.

(2) Cruise control

During acceleration, short press the power button once to switch to the cruise mode. Pull the acceleration/deceleration wheel to end the cruise state. In the constant speed cruising state, if the skateboard and the remote control are disconnected, the skateboard will stop slowly.



The cruise control function is an advanced function.

Please use it with caution before you are familiar with it. Please do not perform special actions during the cruise control. Please end the cruise control function before you need to change gears or perform other operations.

(3) Vibration

The remote control will vibrate in the following two situations:

- When the skateboard battery is less than 25%.
- When the remote control fails to connect to the skateboard.

Note: The safe wireless control distance between the remote control and the skateboard is 2 meters.


PAGE 5

CHANGING WHEELS

The wheel replacement of PIVOT 2-IN-1 is very simple.

- 1. Loosen the bolt next to the wheel.
- 2. Take the wheel and gear out.
- 3. Install the new wheel.
- 4. Tighten the nut.

NOTE: PIVOT's default wheel size and gear ratio are pre-calculated for you to make wheel changing easier and simpler. Our stock PU wheel and AT wheel can share the same configuration, so you don't need to adjust the position of the motor or any parameters within the remote.

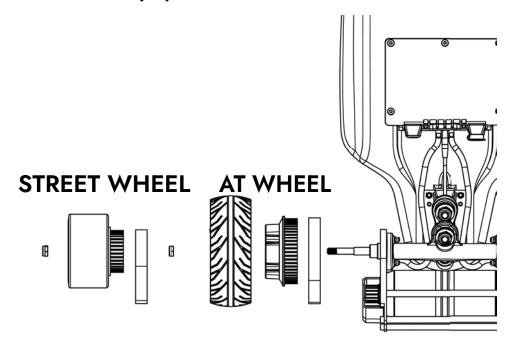



For other third party wheel options please consult the third party wheel manufacturer, check their adaptation tables, check our accessory store, or send an email to services@ridepropel.com with any question you may have. We are here to help.

